


WEIGHT 2.391 LBS		SURFACE AREA 382.055 IN.²		PART DESCRIPTION SINGLE ADJUSTABLE REBOUND SHOCK	
BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005" TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°				MATERIAL	
ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.				RELATIVE TO COMPONENTS	
THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.		DWG. NO. 310 406XX		DRAWN BY EKM	APPROVAL KWK
SIZE B	SCALE 1:4		SHEET 2 OF 2		REV. A



REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	APPROVED	EPCN NO.
	A	ASSEMBLY CREATED	5/6/2019	KWK	

ITEM NO.	PART NUMBER	PART DESCRIPTION	QTY.
1	310 30214	PISTON BAND	1
2	310 30215	PISTON O-RING	1
3	310 30218	TRAVEL INDICATOR	1
4	310 30300	ROD GUIDE, ALUMINUM	1
5	310 3030X-10	ALUMINUM STEALTH TUBE ASSEMBLY	1
6	310 30337-2	TANK VALVE CAP	1
7	310 30377	1/2-20 X 11/16 HEX JAM NUT, ADJUSTABLE	1
8	310 44064	O-RING, NEEDLE	1
9	310 48035	INTERNAL SNAP RING	1
10	310 48052	NUT, PISTON	1
11	310 48054-XXX	INTEGRAL POST, POPPET HOUSING - .170	1
12	310 48055	WASHER - ADJUSTER POPPET HOUSING	1
13	310 48066	INTEGRAL POST, POPPET	1
14	310 48067	INTEGRAL POST POPPET SPRING	1
15		PISTON OF CHOICE	1
16	310 4838X	INTEGRAL POST, PISTON ROD W/ RING	1
17	310 48396	TRAVEL LIMITER, 1.42" X .502"	1
18	310 48396-1	TRAVEL LIMITER - DISC, INTEGRAL POST	1
19	310 60031	ADJUSTER KNOB, IDA	1
20	310 9003X	STD ROD END, INTEGRAL SHAFT ASSEMBLY	1
21	310 9036X-18	INTEGRAL ADJUSTER SHAFT - 18° NEEDLE	1
22	310 90TW070020	90000 SERIES TORQUE WASHER, Ø.700"	4
23		90MVD REBOUND STACK	1
24		90MVD COMPRESSION STACK	1

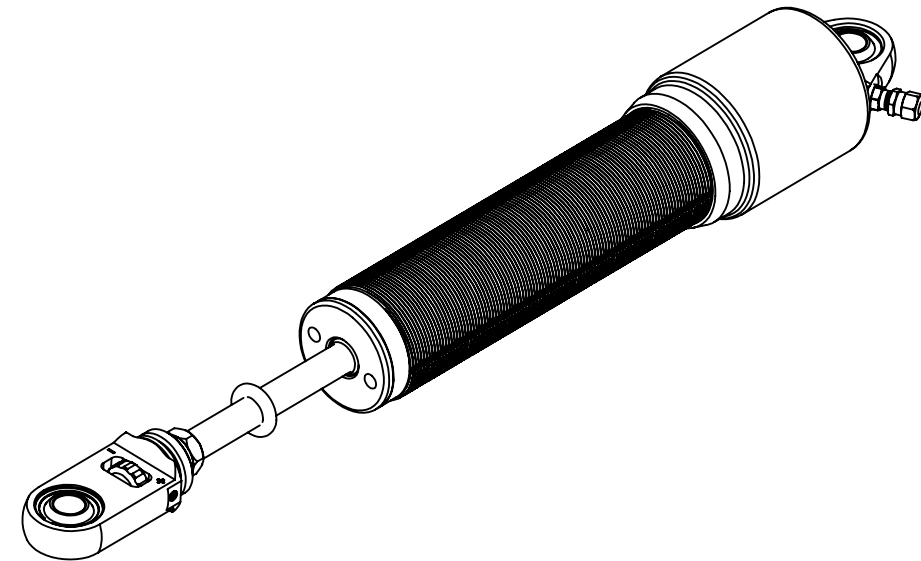

WEIGHT	SURFACE AREA	PART DESCRIPTION			
2.391 LBS	382.055 IN. ²	SINGLE ADJUSTABLE REBOUND SHOCK			
BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005" TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°		MATERIAL			
ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.		RELATIVE TO COMPONENTS			
THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.		DWG. NO.	DRAWN BY	APPROVAL	
		310 406XX	EKM	KWK	
SIZE	SCALE	SHEET	REV.		
B	1:3	1 OF 2	A		