


WEIGHT 2.002 LBS		SURFACE AREA 365.134 IN. <sup>2</sup>		PART DESCRIPTION SMALL BODY COMPRESSION ADJUSTABLE SHOCK	
BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005" TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°				MATERIAL	
ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.				RELATIVE TO COMPONENTS	
THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.		DWG. NO. 310 445XX		DRAWN BY EKM	APPROVAL KWK
SIZE B	SCALE 1:4		SHEET 2 OF 2		REV. A



REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	APPROVED	EPCN NO.
	A	ASSEMBLY CREATED	5/14/2019	KWK	

ITEM NO.	PART NUMBER	PART DESCRIPTION	QTY.
1	310 4400X-50	ROD END ASSEMBLY - SB	1
2	310 30337-2	TANK VALVE CAP	1
3	310 30338	HEX JAM NUT	1
4	310 44005-X	ADJUSTER NEEDLE - SB	1
5		PISTON OF CHOICE - SB	1
6	310 44020-50	SMALL BODY MONOTUBE END CAP ASSEMBLY	1
7	310 4402X	PRESSURE TUBE - SB	1
8	310 4403X	PISTON ROD - SB	1
9	310 4404X	ADJUSTER ROD - SB	1
10	310 44050	LOCKING RING - SB	1
11	310 44051-10	BASE VALVE ASSEMBLY - SB	1
12	310 44052	ROD GUIDE ASSEMBLY - SB	1
13	310 44053	POPPET, ADJUSTER - SB	1
14	310 44054	POPPET HOUSING - SB	1
15	310 44055	WASHER - ADJUSTER POPPET	1
16	310 44057	BLADDER - SB	1
17	310 44062	TRAVEL LIMITER - SB	1
18	310 44063	NUT, PISTON - SB	1
19	310 44064	O-RING, NEEDLE	1
20	310 44066	POPPET, POST - SB	1
21	310 44069	3/8" SAE FLAT WASHER YZ GR9	1
22	310 44071	TRAVEL MARKER - SB	1
23	310 44072	SPRING, POPPET - SB	1
24	310 44073	RETAINING RING - SB	1
25	310 44074	WAVE SPRING - SB	1
26	310 44077	PISTON BAND - SB	1
27	310 44078	O-RING ENGERGIZER, PISTON BAND	1
28	310 44082	RETAINING RING PISTON ROD - SB	1
29	310 44092	8-32 x 3/8 SHCS SS - SB	10
30		COMPRESSION VALVE DISC STACK	1
31	310 TW594020	TORQUE WASHER	4
32		REBOUND VALVE DISC STACK	1

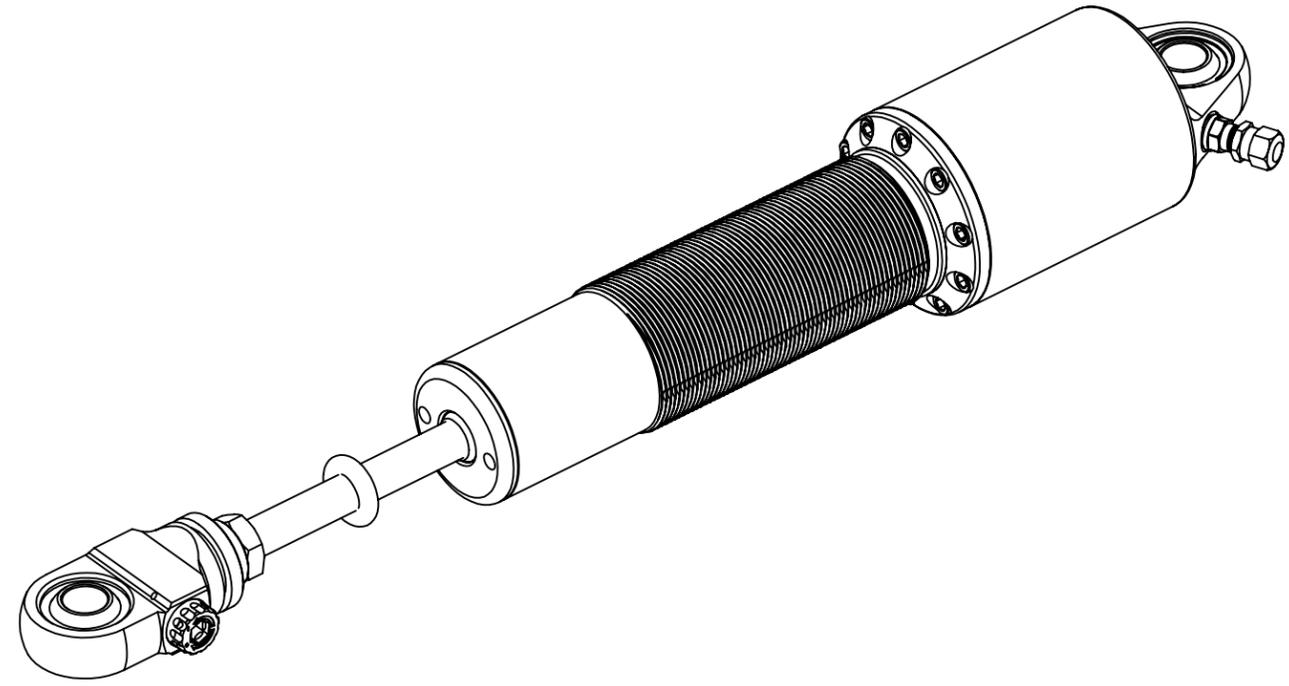

WEIGHT	SURFACE AREA	PART DESCRIPTION		
2.002 LBS	365.134 IN. <sup>2</sup>	SMALL BODY COMPRESSION ADJUSTABLE SHOCK		
<small>BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005"  TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°</small>		MATERIAL		
<small>ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.</small>		RELATIVE TO COMPONENTS		
<small>THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.</small>		DWG. NO.	DRAWN BY	APPROVAL
		310 445XX	EKM	KWK
SIZE	SCALE	SHEET	REV.	
B	1:2	1 OF 2	A	

5

4

3

2

1

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A