

5

4

3

2

1



REVISIONS					
ZONE	REV.	DESCRIPTION	DATE	APPROVED	EPCN NO.
	A	ASSEMBLY CREATED	8/28/2018	KWK	

E

E

D

D

C

C


B

B

A

A

ITEM NO.	PART NUMBER	PART DESCRIPTION	QTY.
1	310 30210	ROD GUIDE SECONDARY O-RING	1
2	310 30218	TRAVEL INDICATOR	1
3	310 30245A	TANK VALVE ASSEMBLY	1
4	310 30332	O-RING SWIVEL BANJO STUD	1
5	310 32077	JAM NUT, .62" PISTON ROD	1
6	310 44064	O-RING, NEEDLE	1
7	310 48035	INTERNAL SNAP RING	1
8	310 48052	NUT, PISTON	1
9	310 48054-170-R	INTEGRAL, POPPET, REBOUND ADJUSTABLE - .170	1
10	310 48396	TRAVEL LIMITER, 1.42" X .502"	2
11	310 60031	ADJUSTER KNOB, IDA	1
12	310 900XX	PISTON - STEALTH 2	1
13	310 90031	STD INTEGRAL ROD END, .563	1
14	310 9007X-10	STEALTH 2 PRESSURE TUBE ASSEMBLY	1
15	310 90213	FLOATING PISTON O-RING, 1.938	1
16	310 90214	PISTON BAND, 1.938 BORE	1
17	310 90287	ROD GUIDE, FLOATER - .62, 1.938	1
18	310 90334	FLOATING PISTON, 1.938 BORE	1
19	310 9036X-02	INTEGRAL ADJUSTER SHAFT - 2° NEEDLE	1
20	310 90387	ADJUSTABLE PISTON ROD, 1.938 BORE	1
21	310 90TWXXXXXX	90000 SERIES TORQUE WASHER, Ø.XXX"	4
22	310 96245	TANK VALVE ADAPTER	1
23		90MVD COMPRESSION STACK	1
24		90MVD REBOUND STACK	1

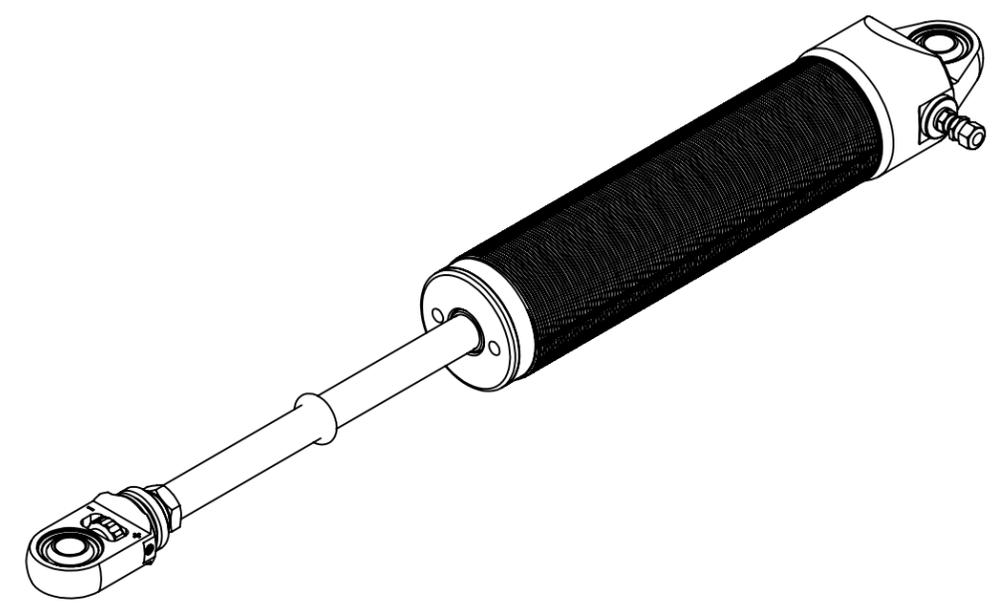

WEIGHT (lbs)	1.998	PART DESCRIPTION			
S.A. (in ²)	382.600	X.XX" REBOUND ADJUSTABLE STEALTH II			
BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005" TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°		MATERIAL			
ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.		RELATIVE TO COMPONENTS			
THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.		DWG. NO	DRAWN BY	APPROVAL	
		310 906XX	GJH	KWK	
SIZE	SCALE	SHEET		REV	
B	1:3	1 OF 2		A	


5

4

3

2

1

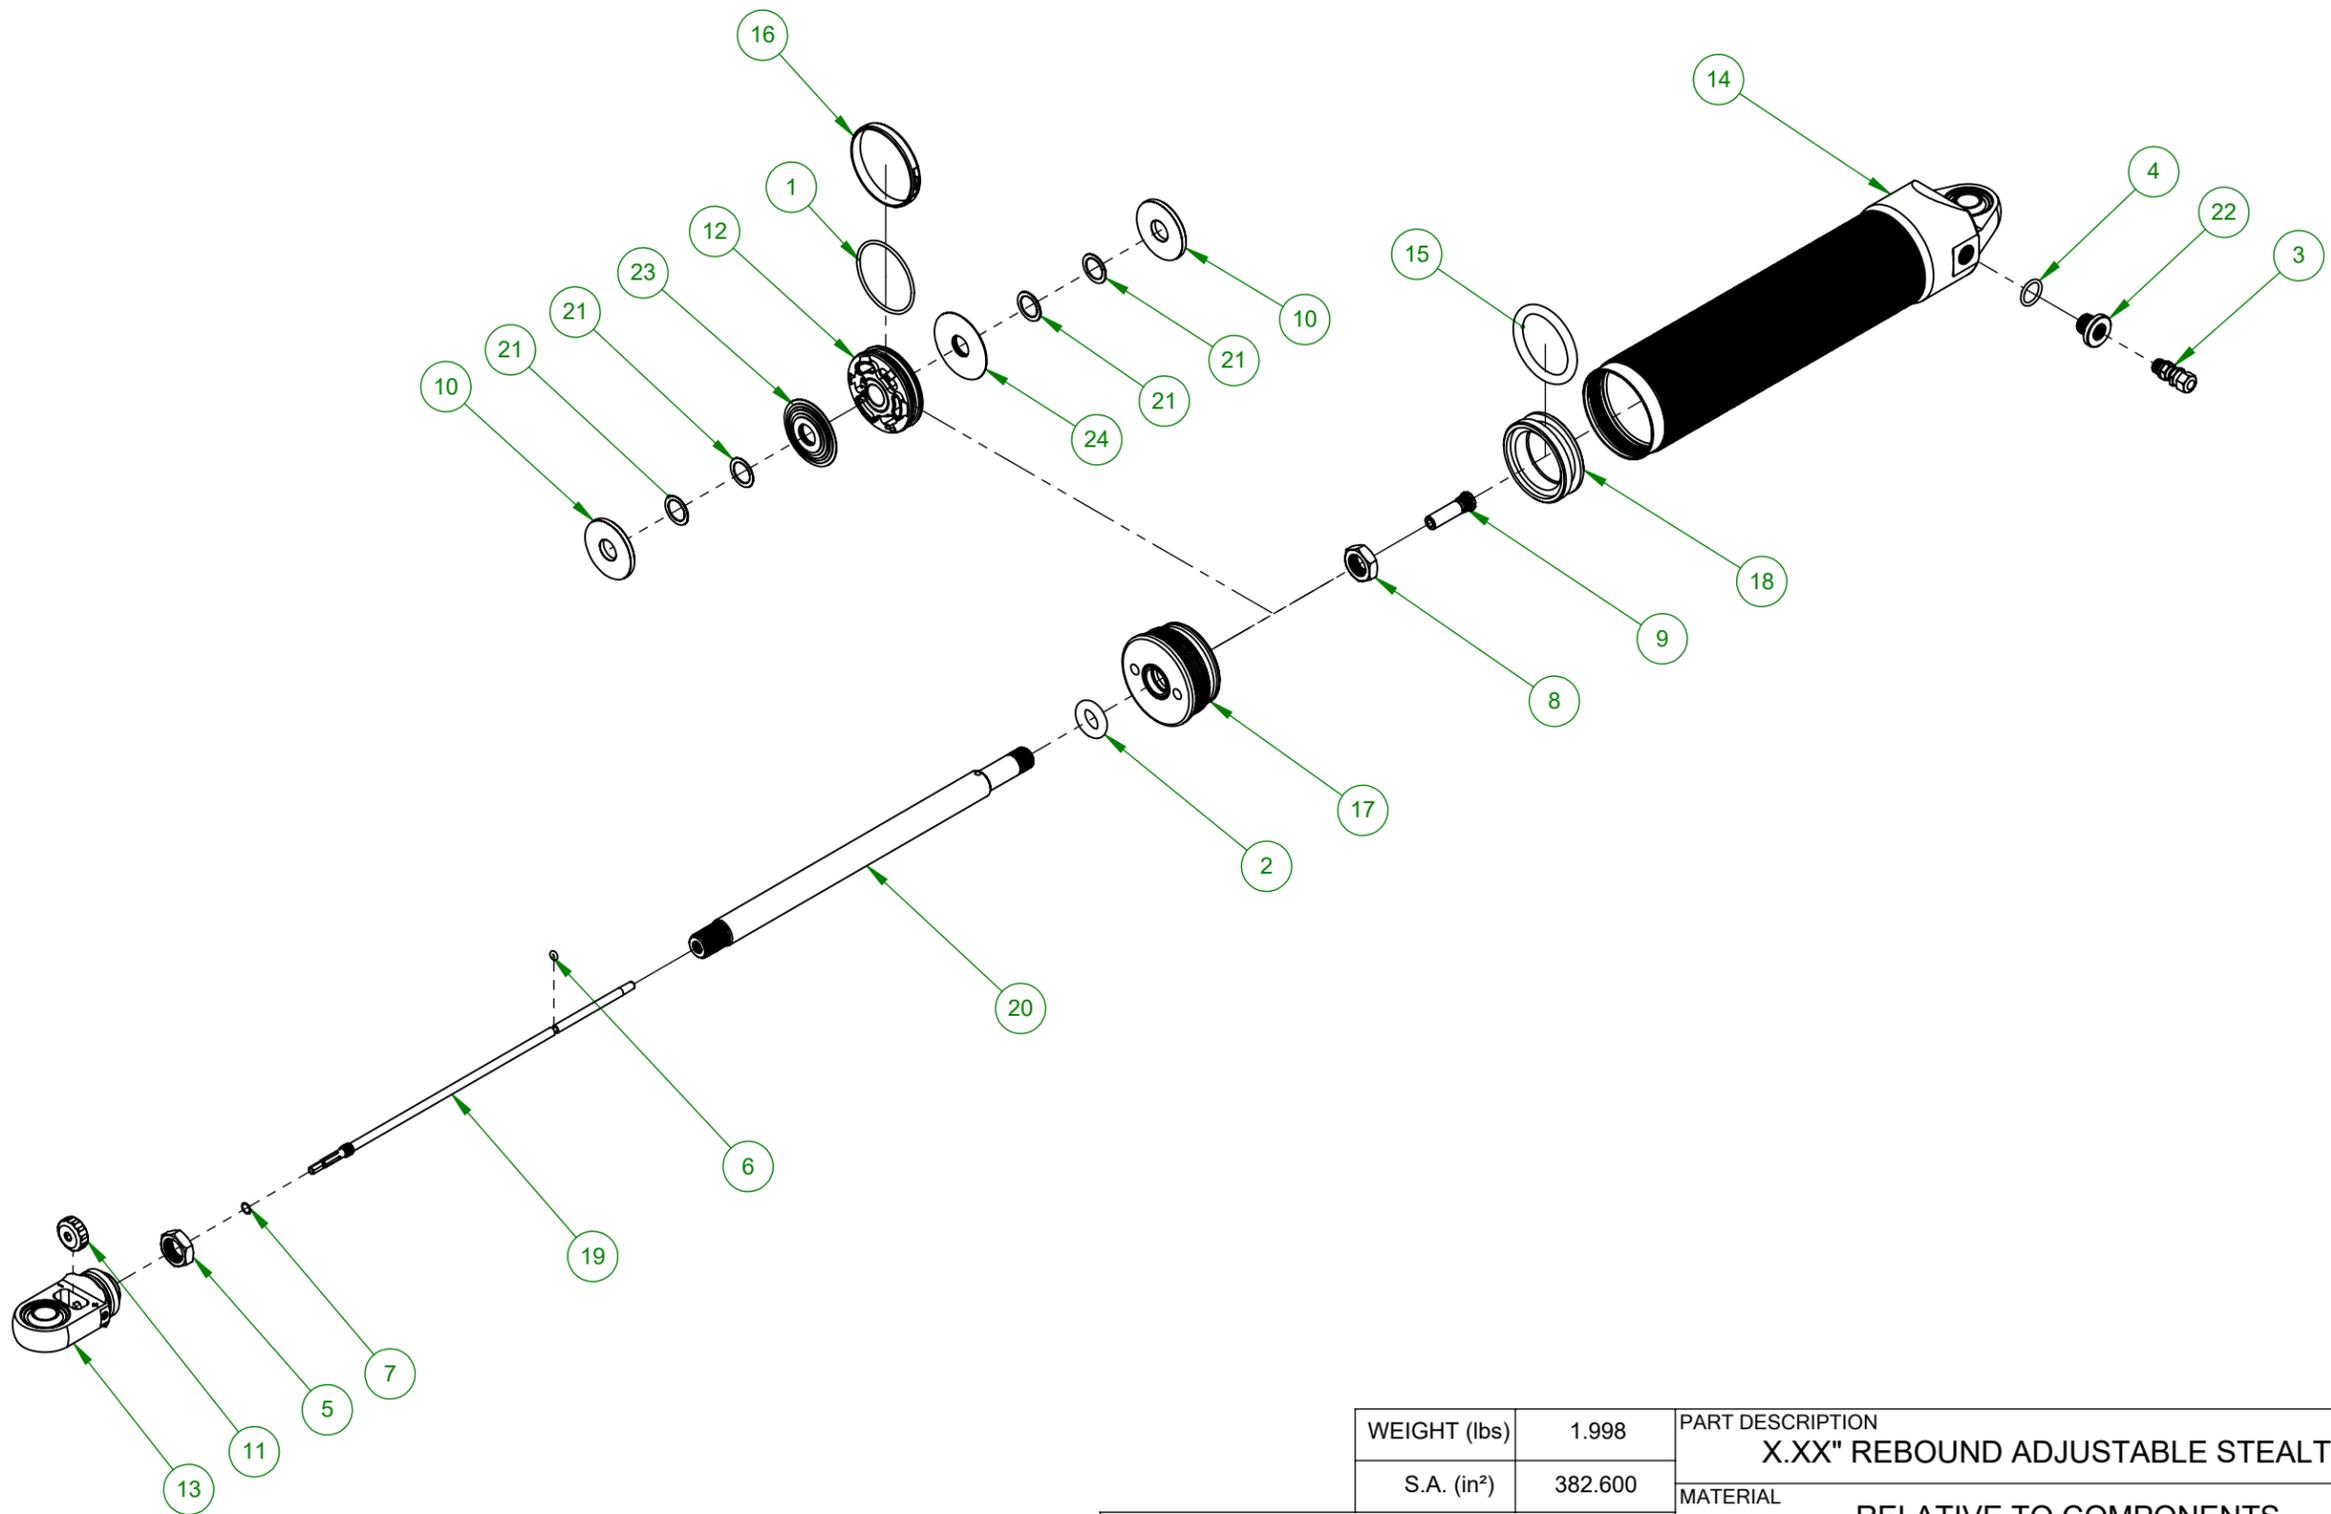

WEIGHT (lbs)	1.998	PART DESCRIPTION		
S.A. (in ²)	382.600	X.XX" REBOUND ADJUSTABLE STEALTH II		
MATERIAL		RELATIVE TO COMPONENTS		
DWG. NO		DRAWN BY	APPROVAL	
310 906XX		GJH	KWK	
SIZE	SCALE	SHEET		REV
B	1:4	2 OF 2		A

BREAK EDGES .010 +/- 0.005" X 45°, FILLET RADII 0.010" +/- 0.005"
 TOLERANCES (UOS): .XX +/- .01", .XXX +/- .003", ANG +/- 0.5°

ALL SURFACE FINISHES TO BE Ra 64 OR BETTER UNLESS OTHERWISE SPECIFIED.

THIS DRAWING, INFORMATION, AND TECHNICAL DATA CONTAINED WITHIN ARE THE EXCLUSIVE PROPERTY OF INTEGRA SHOCKS AND SHALL BE RETURNED UPON REQUEST. THIS DRAWING IS NOT TO BE REPRODUCED IN WHOLE OR IN PART, NOR SHALL ANY INFORMATION OR TECHNICAL DATA BE SUPPLIED, IN ANY FORM, TO ANYONE ELSE WITHOUT THE EXPRESS WRITTEN CONSENT OF INTEGRA SHOCKS.

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A

5

4

3

2

1